




FOURIER SERIES

Consider a function, $f(x)$, defined on the interval $[-\frac{L}{2}, \frac{L}{2}]$:

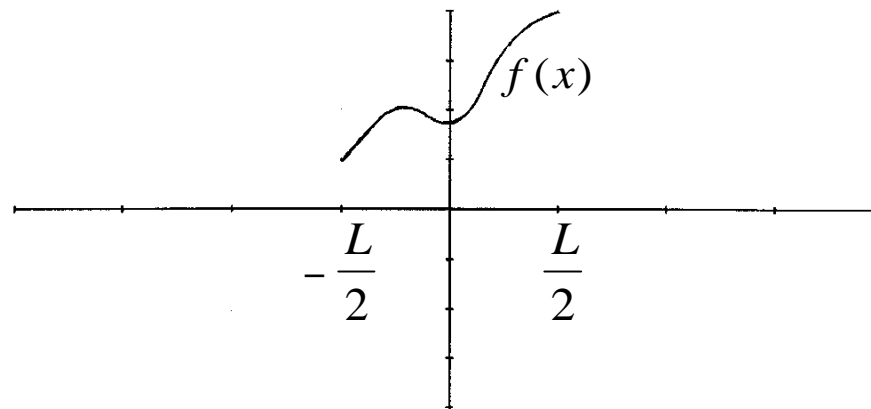

We now want to approximate $f(x)$ on the interval $[-\frac{L}{2}, \frac{L}{2}]$ with a Fourier series, $\tilde{f}(x)$.

A Fourier series is a linear combination of a set of basis functions, $\{ \phi_n(x) = e^{2\pi i n x / L}, n \in \mathbb{Z} \}$, that is

$$\tilde{f}(x) = \sum_{n=-\infty}^{\infty} c_n e^{2\pi i n x / L}$$

where c_n are the Fourier coefficients.



These basis functions have two important properties. They are

(1) PERIODIC with period L , that is $\phi_n(x + L) = \phi_n(x)$, and


(verify)

(2) ORTHOGONAL on the interval $[-\frac{L}{2}, \frac{L}{2}]$, that is

$$\int_{-\frac{L}{2}}^{\frac{L}{2}} e^{2\pi i n x / L} e^{-2\pi i k x / L} dx = \begin{cases} 0, & \text{if } n \neq k \\ L, & \text{if } n = k \end{cases}$$

(verify)

Property (1) implies that $\tilde{f}(x + L) = \tilde{f}(x)$. Therefore $\tilde{f}(x)$ does not only approximate $f(x)$, but also the periodic continuation of $f(x)$ on the interval $[-\frac{L}{2}, \frac{L}{2}]$, that is $p(x)$:

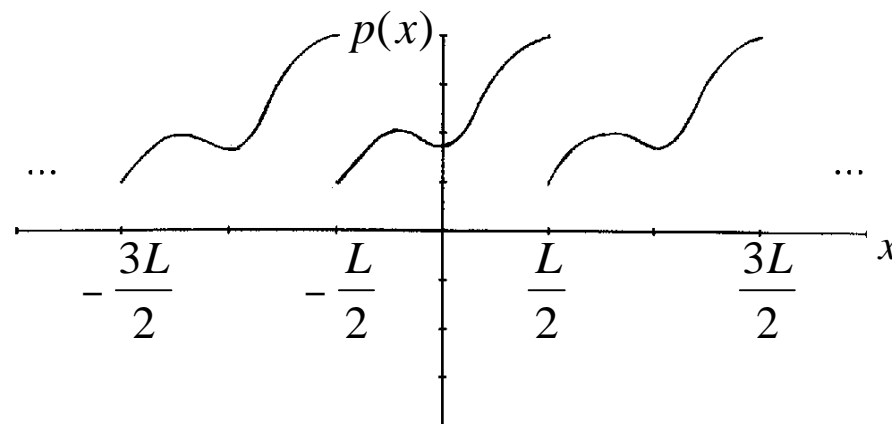



Property (2) enables one to calculate the **Fourier coefficients**, c_n , easily and therefore also the **Fourier series** $\tilde{f}(x)$:

$$\begin{aligned}\int_{-\frac{L}{2}}^{\frac{L}{2}} f(x)e^{-2\pi ikx/L} dx &= \sum_{n=-\infty}^{\infty} c_n \int_{-\frac{L}{2}}^{\frac{L}{2}} e^{2\pi inx/L} e^{-2\pi ikx/L} dx \\ &= 0 + 0 + \dots + c_k \times L + \dots + 0 + 0\end{aligned}$$

Therefore...

$$c_n = \frac{1}{L} \int_{-\frac{L}{2}}^{\frac{L}{2}} f(x)e^{-2\pi inx/L} dx$$

Example 1: Find $\tilde{f}(x)$ when $f(x) = |x|$ on the interval $[-1, 1]$

$$\begin{aligned}c_n &= \frac{1}{2} \int_{-1}^1 f(x)e^{-\pi inx} dx = \frac{1}{2} \int_{-1}^1 f(x) [\cos(n\pi x) - i \sin(n\pi x)] dx \\ &= \frac{2}{2} \int_0^1 x \cos(n\pi x) dx = \left(\frac{x}{n\pi} \sin(n\pi x) \right)_0^1 - \frac{1}{n\pi} \int_0^1 \sin(n\pi x) dx \\ &= -\frac{1}{n\pi} \left(-\frac{1}{n\pi} \cos(n\pi x) \right)_0^1 = \frac{(-1)^n - 1}{n^2 \pi^2} = \begin{cases} 0, & \text{if } n \text{ even } (n \neq 0) \\ -\frac{2}{n^2 \pi^2}, & \text{if } n \text{ odd} \end{cases}\end{aligned}$$



$$c_0 = \frac{1}{2}$$

(verify)

Therefore

$$\begin{aligned}\tilde{f}(x) &= \frac{1}{2} - \frac{2}{\pi^2} \sum_{\substack{n=-\infty \\ (n \text{ odd})}}^{\infty} \frac{e^{in\pi x}}{n^2} \\ &= \frac{1}{2} - \frac{4}{\pi^2} \sum_{n=1,3,5,\dots}^{\infty} \frac{\cos(n\pi x)}{n^2}\end{aligned}$$

(verify)

Speed of convergence

How fast does the coefficients $|c_n|$ decrease when $n \rightarrow \infty$?


For **Example 1** we have:

$$|c_n| = \frac{2}{n^2\pi^2}, \quad n \text{ odd}$$

$$|c_0| = \frac{1}{2}$$

$$|c_n| = 0, \quad n \text{ even } (n \neq 0)$$

Therefore the coefficients $|c_n|$ decrease like $\frac{1}{n^2}$

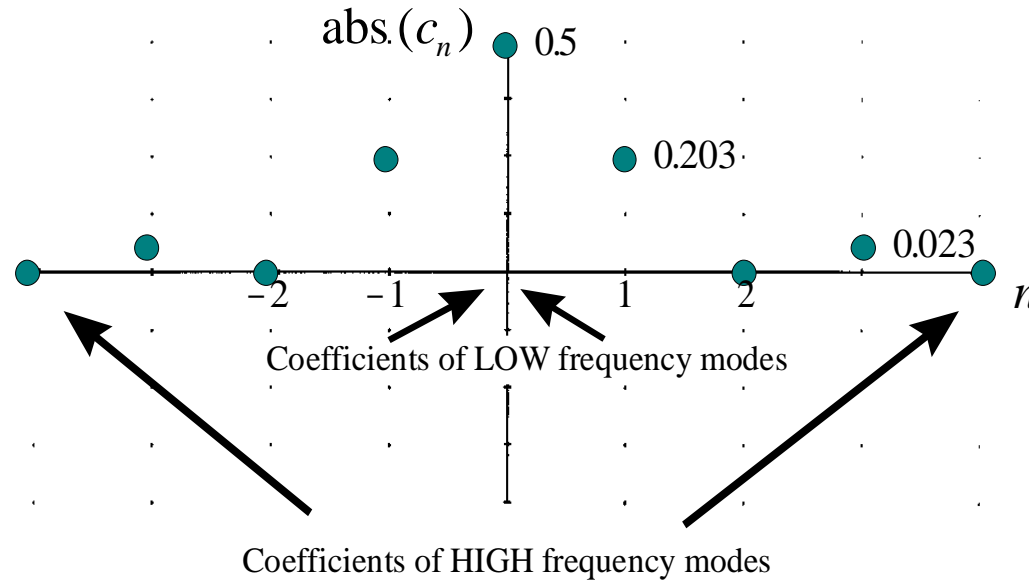

Example 2

Find $\tilde{f}(x)$ when $f(x) = x$ on the interval $[-1, 1]$


$$c_n = \frac{i(-1)^n}{n\pi}, \quad c_0 = 0$$

$$|c_n| = \frac{1}{n\pi}, \quad |c_0| = 0$$

Therefore the coefficients $|c_n|$ decrease like $\frac{1}{n}$ and

$$\tilde{f}(x) = \frac{i}{\pi} \sum_{n=-\infty}^{\infty} \frac{(-1)^n e^{in\pi x}}{n} = -\frac{2}{\pi} \sum_{n=1}^{\infty} \frac{(-1)^n \sin(n\pi x)}{n}$$

(verify)

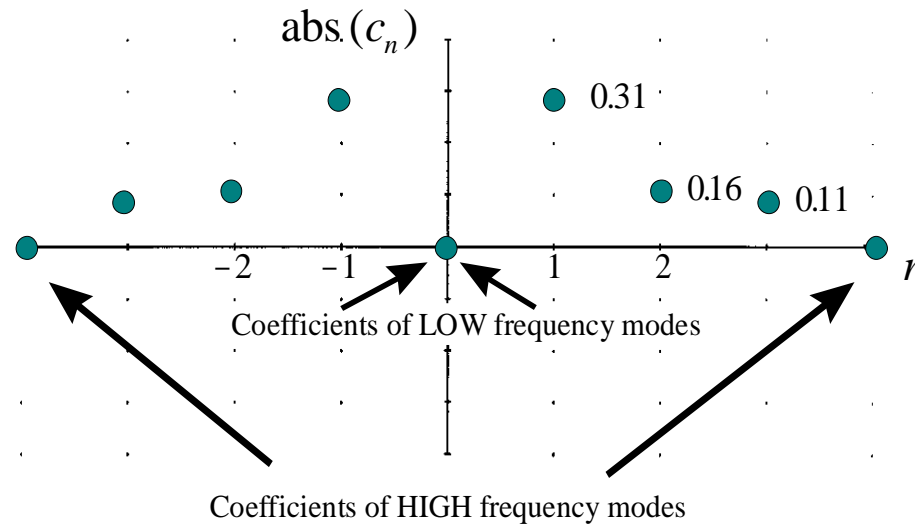

In general we have the following ...

When $p(x)$ is the periodic continuation of $f(x)$ on the interval $[-\frac{L}{2}, \frac{L}{2}]$, then

Periodic continuation	Fourier series
$p(x)$ discontinuous	Converges like $\frac{1}{n}$
$p(x)$ continuous $p'(x)$ discontinuous	Converges like $\frac{1}{n^2}$
$p(x)$ continuous $p'(x)$ continuous $p''(x)$ discontinuous	Converges like $\frac{1}{n^3}$

etc.




Therefore, the smoother the periodic continuation of $f(x)$ is, the faster its Fourier series will converge

This property is important when it comes to the compression of images (LATER)

Example 3


Find $\tilde{f}(x)$ when $f(x) = x$, $x \in [0, 1]$

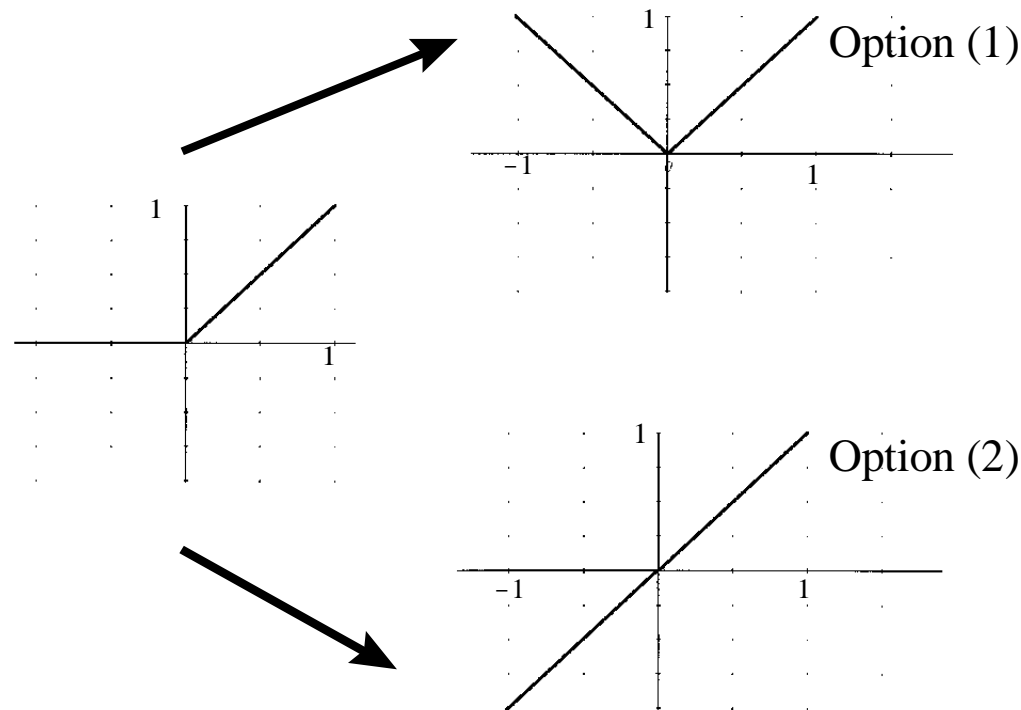

Why is option (1) better?





The difference in the speed of convergence of the Fourier series in Examples 1 and 2 is clear when the truncated Fourier series are plotted for different values of n

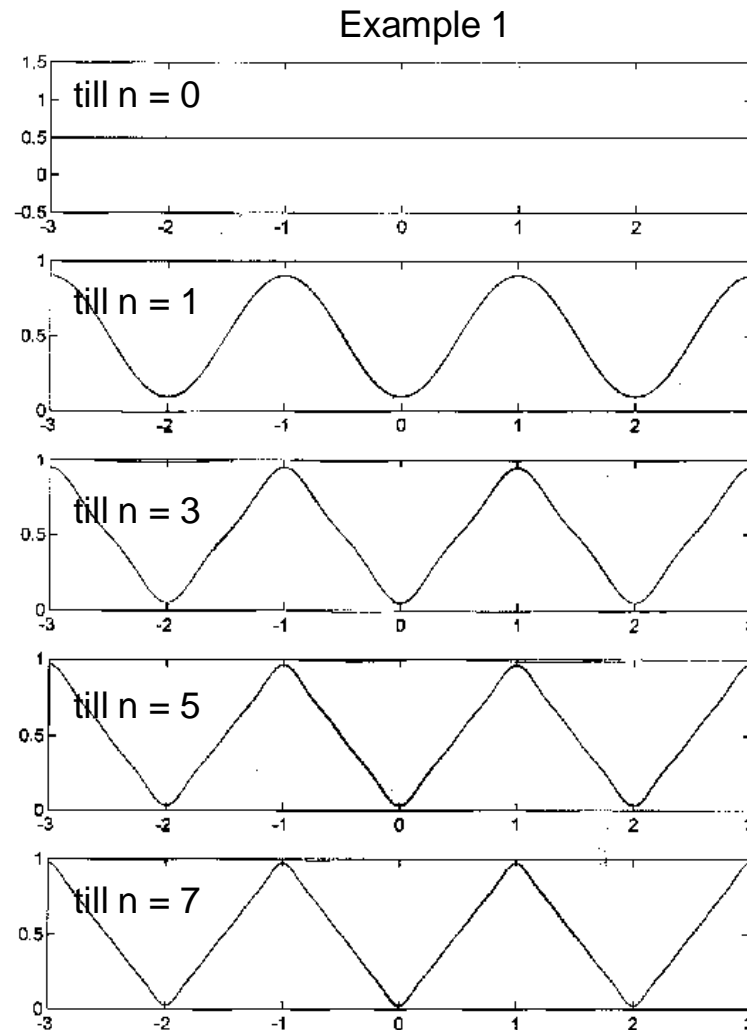



Example 2

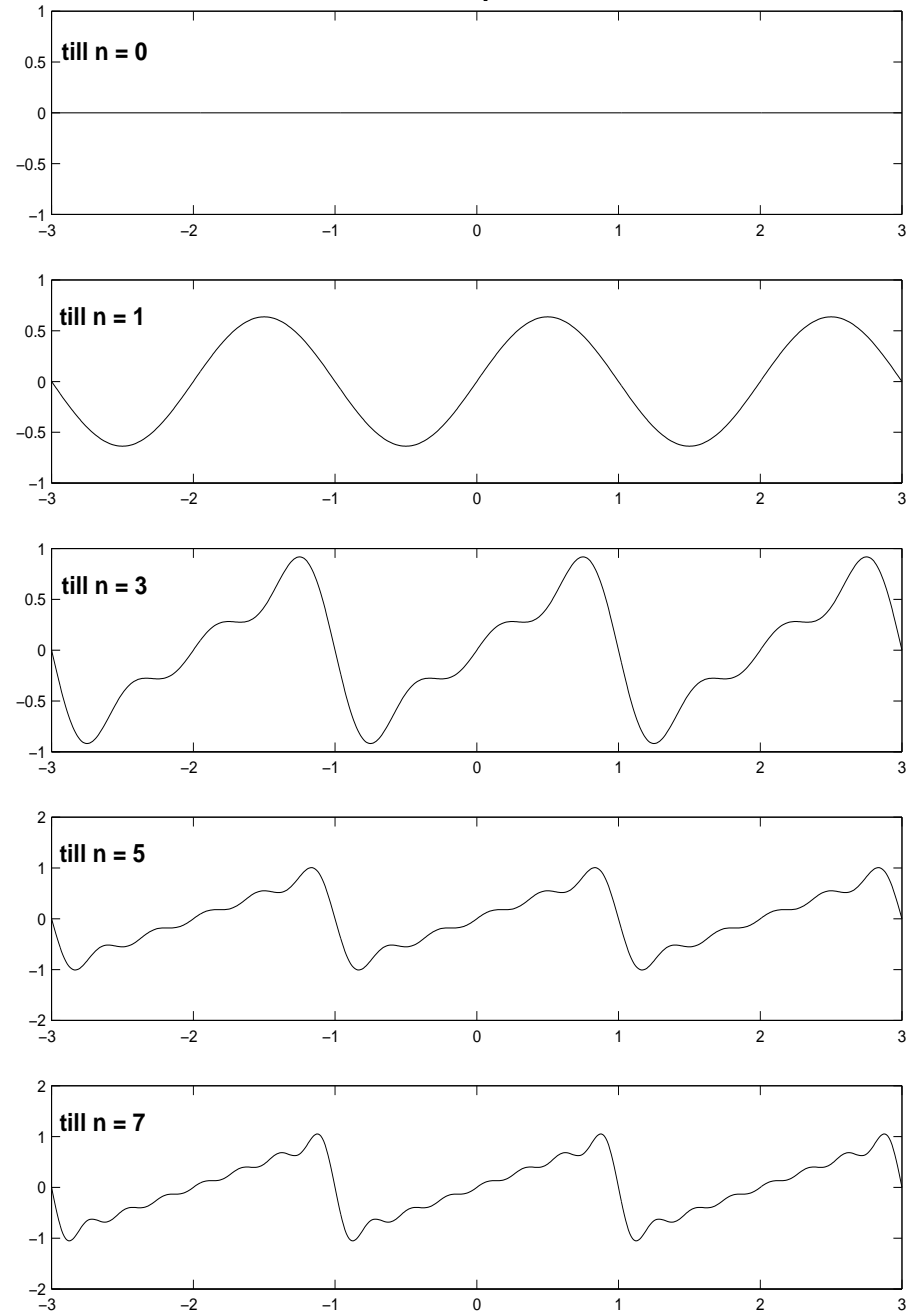

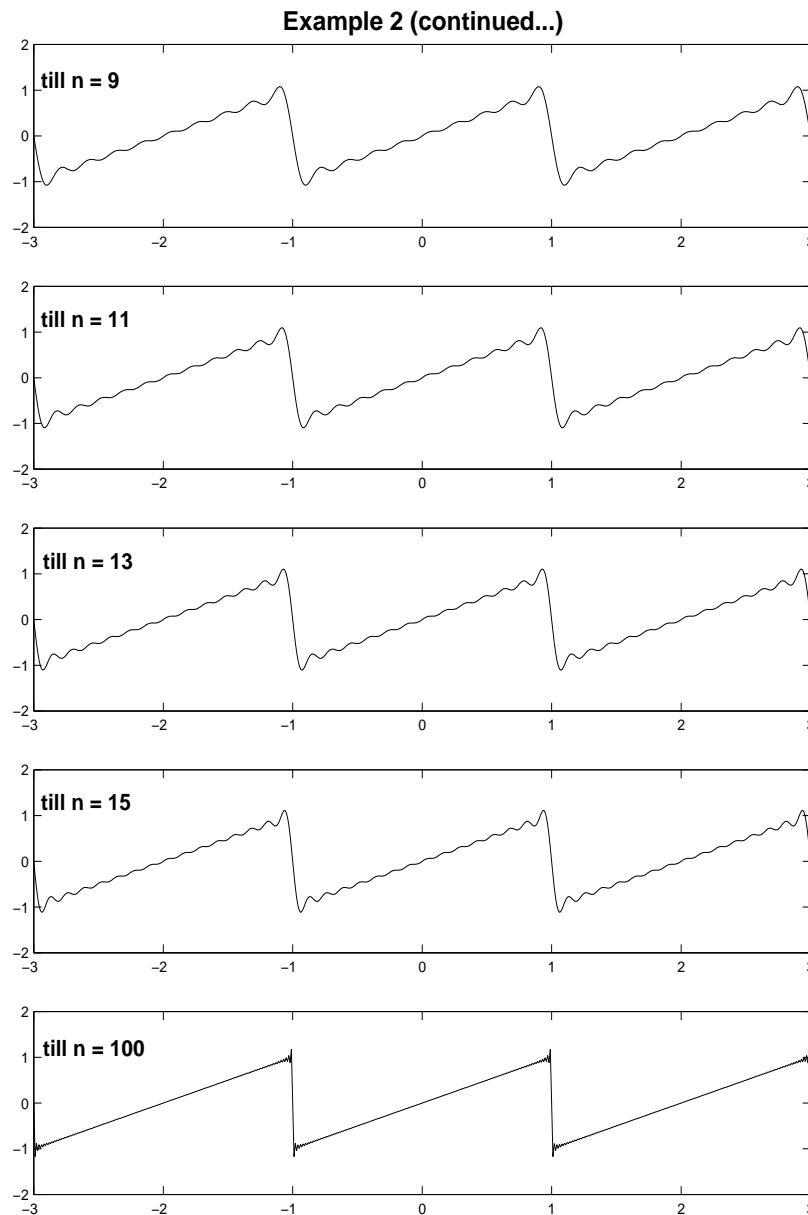

The Gibbs phenomenon occurs in Example 2, since the periodic continuation has step discontinuities



We now set out to develop the Fourier transform (Fourier integral) of a function $f(x)$, since Fourier series have two important deficiencies:

- (1) They utilize only periodic functions $\phi(x) = e^{2\pi inx/L}$ with frequencies of $\frac{n}{L}$, where $n \in \mathbb{Z}$, and no periodic functions with frequencies between these discrete values
- (2) They can only approximate periodic functions, that is L has to be finite

To go from a Fourier series to a Fourier transform, we need to let $L \rightarrow \infty$

THE FOURIER TRANSFORM

(Derivation)


$$\begin{aligned}\tilde{f}(x) &= \frac{1}{L} \sum_{n=-\infty}^{\infty} \left[\int_{-\frac{L}{2}}^{\frac{L}{2}} f(t) e^{-2\pi int/L} dt \right] e^{2\pi inx/L} \\ &= \frac{1}{L} \sum_{n=-\infty}^{\infty} \int_{-\frac{L}{2}}^{\frac{L}{2}} f(t) e^{2\pi in(x-t)/L} dt \\ &= \frac{2}{L} \sum_{n=1}^{\infty} \int_{-\frac{L}{2}}^{\frac{L}{2}} f(t) \cos(2\pi n(x-t)/L) dt + \frac{1}{L} \int_{-\frac{L}{2}}^{\frac{L}{2}} f(t) dt\end{aligned}$$

Let $u_n = \frac{n}{L}$ then $u_{n+1} = \frac{n+1}{L} = u_n + \Delta u$, or $u_{n+1} - u_n = \Delta u = \frac{1}{L} \forall n$,



then:

$$\tilde{f}(x) = 2 \sum_{n=1}^{\infty} \Delta u \int_{-\frac{L}{2}}^{\frac{L}{2}} f(t) \cos(2\pi u_n(x-t)) dt + \frac{1}{L} \int_{-\frac{L}{2}}^{\frac{L}{2}} f(t) dt$$

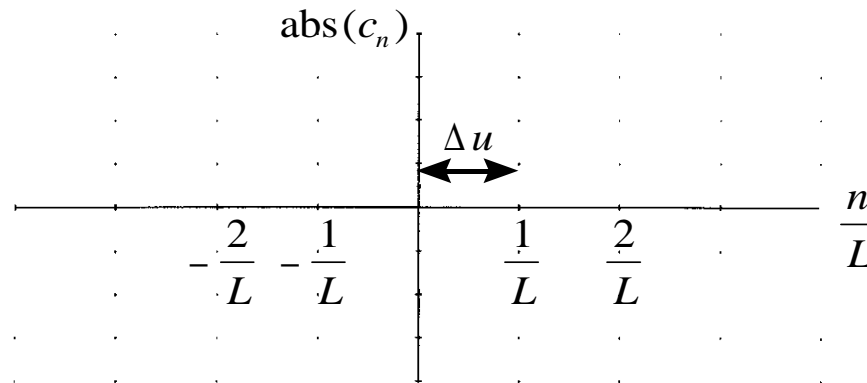

Let $L \rightarrow \infty \Rightarrow \Delta u \rightarrow 0 \Rightarrow$ the above becomes continuous \Rightarrow deficiencies (1) and (2) are addressed

If we assume that $\int_{-\infty}^{\infty} f(t) dt < \infty$ ($f(t) \rightarrow 0$ when $t \rightarrow \pm\infty$), then ...

$$\begin{aligned} \tilde{f}(x) = f(x) &= 2 \lim_{\Delta u \rightarrow 0} \sum_{n=1}^{\infty} \Delta u \overbrace{\int_{-\infty}^{\infty} f(t) \cos(2\pi u_n(x-t)) dt}^{H(u_n)} \\ &= 2 \int_0^{\infty} \int_{-\infty}^{\infty} f(t) \cos(2\pi u(x-t)) dt du \text{ (continuous!)} \\ &= \frac{1}{2} (2) \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} f(t) \cos(2\pi u(x-t)) dt du \dots \boxed{1} \end{aligned}$$



Also

$$\int_{-\infty}^{\infty} \int_{-\infty}^{\infty} f(t) \sin(2\pi u(x-t)) dt du = 0 \dots \boxed{2}$$

$\boxed{1} + i \boxed{2}$:

$$\begin{aligned} f(x) &= \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} f(t) e^{2\pi i u(x-t)} dt du \\ &= \int_{-\infty}^{\infty} e^{2\pi i u x} \underbrace{\int_{-\infty}^{\infty} f(t) e^{-2\pi i u t} dt}_{F(u)} du \end{aligned}$$

In summary, we have the following for the one dimensional continuous case:

$$\mathbf{FT} \{f(x)\} = F(u) = \int_{-\infty}^{\infty} f(x) e^{-2\pi i u x} dx$$

$$\mathbf{IFT} \{F(u)\} = f(x) = \int_{-\infty}^{\infty} F(u) e^{2\pi i u x} du$$

